Contained Solvent IBC & Drum sampling


Bringing an advanced level of containment to your work environment



Sampling of Hazardous solvents is a key stage of pharmaceutical manufacturing. Howorth WorkSAFE Enclosures are designed utilising our specialist experience including stringent safety measures to ensure protection of personnel and the environment.

- Designed to safely handle hazardous Solvents <1ppm
- Negative pressure cascades
- HEPA Filter supply air over the open IBCs & drums
  N2 Purge Hand Gun
- Spillage Sump
- Integration of sampling devices sample storage areas
- Full ergonomic assessment
- Designed to the specified hazardous area classification
- Equipment Earthing Points
- Compliance with all appropriate design standards and guidelines



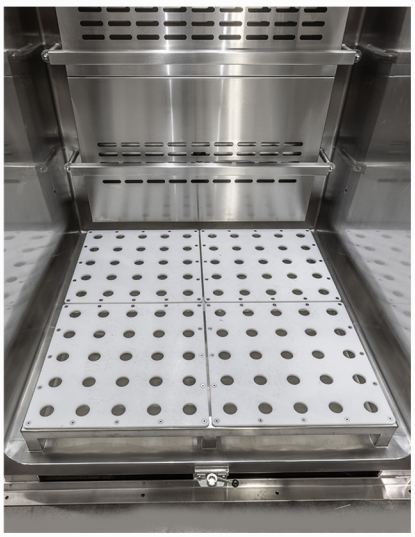



Airflow Operation:

- H14 HEPA air wash over open IBCs & Drums to prevent cross contamination
- Negative Pressure Operating system
  Audible & visual alarms
  Magnehelic Airflow Gauges

Adjustable base & Spillage capture:

- 316L Stainless Steel spillage tray
- Height adjustable 316L Stainless Steel base c/w PTFE floor.
- Heights to allow for IBC vs various drum heights

Manual N2 Purge System:

- N2 Purge Hand Gun for open IBCs & Drums
- Integrated O2 Analyser to detect N2 before doors are opened
  Earthing Points for Equipment grounding



Gary Storr
Business Development Manager
North America
gary.storr@howorthgroup.com
Mobile: +1 (636) 428-1800

USA Office
Howorth Air Technology Inc.
4601 Corporate Drive NW, #140
Concord NC 28027